



330 - 340 Wp 120 MONOCRYSTALLINE HALF-CUT CELLS

AEG solar modules combine the most advanced technology with high reliability in manufacture to offer you a product meant for high achievements.



OPTIMIZED DESIGN MAXIMUM EFFICIENCY

AEG solar modules with half-cut cells and 9 busbar technology are designed to maximize efficiency and plant performance. The 110 cm extra-long cables allow more installation flexibility and comfort.



CAREFUL SELECTION, PREMIUM LOOK

The careful selection of components (cells, backsheet and frames) ensures a premium product look and provides extra aesthetical value.

COMPREHENSIVELY CERTIFIED

AEG solar modules and production facilities are compliant with the the latest standards to guarantee safety and reliability. Production facilities are certified according to ISO 9001, ISO 14001 and OHSAS 18001. AEG solar products are certified among others by:



YOUR ADVANTAGE AT A GLANCE

Premium solar panel with quality components
High efficiency - up to 340 Wp
Product certified IEC 61215:2016, IEC 61730:2016
12 years Product warranty
25 years linear Power warranty



ELECTRICAL CHARACTERISTICS AT STC¹

		AS-M1203-H-330	AS-M1203-H-335	AS-M1203-H-340
Nominal Power (Pmax)	[Wp]	330	335	340
Power Sorting ²	[Wp]	-0 / +5	-0 / +5	-0 / +5
Maximum Power Voltage (Vmp)	[V]	34.17	34.44	34.69
Maximum Power Current (Imp)	[A]	9.66	9.73	9.80
Open Circuit Voltage (Voc)	[V]	41.32	41.61	41.88
Short Circuit Current (Isc)	[A]	10.14	10.22	10.30
Module Efficiency (ηm)		19.5%	19.8%	20.1%
Maximum System Voltage	[V]	1000	1000	1000
Series Fuse Maximum Rating	[A]	20	20	20

ELECTRICAL CHARACTERISTICS NMOT³

		AS-M1203-H-330	AS-M1203-H-335	AS-M1203-H-340
Maximum Power (Pmax)	[W]	246.1	249.8	253.5
Maximum Power Voltage (Vmp)	[V]	31.85	32.10	32.35
Maximum Power Current (Imp)	[A]	7.73	7.78	7.84
Open Circuit Voltage (Voc)	[V]	38.85	39.12	39.37
Short Circuit Current (Isc)	[A]	8.16	8.22	8.28

MECHANICAL CHARACTERISTICS

Solar cells	120 [(6 x 10) x 2] monocrystalline silicon, 156.75 x 78 mm half-cut cells
Front glass	3.2 mm (0.12") high-transparency AR coating glass
Backsheet	White backsheet
Encapsulant	EVA (Ethylene-Vinyl Acetate)
Frame	Anodized aluminum alloy, silver or black color („zebra“)
Junction box	IP67, 3 bypass diodes
Cables	UV resistant cable 110 cm (43.3"), sec.4.0 mm ²
Connectors	MC4 compatible connectors
Dimensions	1692 mm x 1002 mm x 35 mm (66.6" x 39.4" x 1.38")
Weight	19.1 kg (42.1 lbs)
Maximum load	Wind: 2400 Pa / Snow: 5400 Pa


TEMPERATURE CHARACTERISTICS

NOCT	44°C ± 2°C
Pmax Temp. Coefficient (γ)	-0.343 %/C
Voc Temp. Coefficient (β)	-0.272 %/C
Isc Temp. Coefficient (α)	0.035 %/C
Operating temperature	-40°C to + 85°C

PACKING CONFIGURATION

Packing configuration	31 pcs / pallet
Loading capacity	806 pcs / 40 ft HC

TECHNICAL DRAWINGS

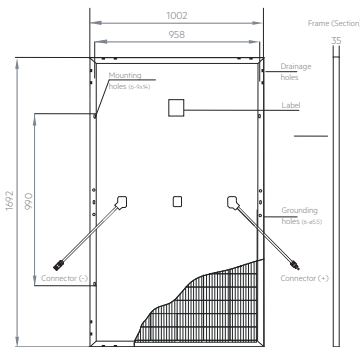

Module dimensions in the technical picture are expressed in mm with tolerance ±2 mm (+0.079")

1- Standard Test Conditions (STC): Irradiance 1000 W/m²; Air Mass AM = 1.5; Cell Temperature 25°C; Tolerance on Pmax ± 3%; Tolerance on Voc ± 3%; Tolerance on Isc ± 5%

2- AEG photovoltaic modules are classified according to a principle of positive power tolerance: the Power Output measured at STC of the delivered modules exceeds their assigned Nameplate Nominal Power at STC within a power tolerance range between -0 Wp and +5 Wp.

3- Nominal Module Operating Temperature (NMOT): Irradiance 800 W/m²; Wind Speed 1m/s; Ambient Temperature 20°C; Air Mass AM=1.5)

4- No less than 97% of the minimum "Peak Power at STC" in the first year; power output decline no more than 0.7% per year thereafter). Full text of the Warranty Terms available at: www.aeg-industrialsolar.de

© Solar Solutions GmbH. Specifications in this datasheet are subject to change without notice. Code: AS-M1203-H-KM0N1-98B-330-340 / version 2020.03.V1EN

AEG is a registered trademark used under license from AB Electrolux (publ).

WARRANTIES

Product warranty	12 years
Performance warranty	25 years, linear ⁴

I-V CURVES / IRRADIANCES

